


Window Units - Remote Cooling Only



Window Units

FEATURES

- Multiple Functions - Cooling, Dehumidifying & Fan Ventilation
- Installation Kit with Expandable Side Panels
- Retracting Louvers

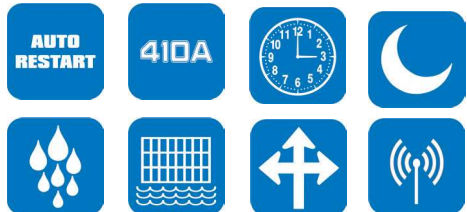

Electrical Requirements

- NEMA 5-15A
115 VOLT
15 AMP
- NEMA 6 - 15P
230 VOLT
15 AMP
- NEMA 6 - 20P
230 VOLT
20 AMP
- NEMA 6 - 30P
230 VOLT
25 AMP



IRP Model No.	WA46YER	WA48YER	WA410YER	WA412YER
Product Code	421-0100	421-0101	421-0102	421-0103
Cooling Capacity	6,050	8,000	10,200	12,100
Rated Voltage	115	115	115	115
CEER Rating	12.1	12	12	12
EER Rating	12.3	12.1	12.1	12.1
Dehumidification (pints/hr)	1.27	1.9	2.6	3.72
Max Air Flow (CFM)	177	224	288	288
Operating Voltage Range	103.5-126.5	103.5-126.5	103.5-126.5	103.5-126.5
Frequency/Cycle	60 HZ	60 HZ	60 HZ	60 HZ
Cooling Amps	4.6	6	7.8	9.2
Cooling Watts	490	660	840	1000
Plug Type – LCDI	5-15P	5-15P	5-15P	5-15P
Power Cord Rating (amps)	10	13	13	15A
Power Cord Length (ft)	6	6	6	6.4
Refrigerant Charge - R410a (oz.)	14.82	16.2	20.46	24.69
Max dbA Level (Indoor/Outdoor)	65/67	69/72	69/77	69/77
4 Way Air Adjustment	Yes	Yes	Yes	Yes
2 Way Air Swing	Yes	Yes	Yes	Yes
Air Discharge	Top Front	Top Front	Top Front	Top Front
Compressor Capacitor	45 μ F	55 μ F	55 μ F	65 μ F
Fan Motor Capacitor	6 μ F	15 μ F	15 μ F	15 μ F
Controls	Remote	Remote	Remote	Remote
Ambient Operating Temperature	64-109 °F	64-109 °F	64-109 °F	64-109 °F
Unit Width	18.6"	20.9"	21.3"	21.3"
Unit Depth	15.7"	15.8"	21.5"	21.4"
Unit Height	12.8"	12.8"	15.7"	15.7"
Window Width Opening	22"-36"	22"-36"	24.4"-38.4"	24.4"-38.4"
Thru. Wall Max. Thickness	4.6"	4.6"	8.8"	8.8"
Chassis Slide Out	No	No	No	No
N.W. /G.W. (Lbs)	46.3/52.9	52.9/59.5	66.1/73.9	71.5 / 79.2
Energy Star	Yes	Yes	Yes	Yes

Window Units - Remote Cooling Only

Electrical Requirements



FEATURES

- Multiple Functions - Cooling, Dehumidifying & Fan Ventilation
- Installation Kit with Expandable Side Panels
- Retracting Louvers



NEMA 5-15A
115 VOLT
15 AMP



NEMA 6 - 15P
230 VOLT
15 AMP



NEMA 6 - 20P
230 VOLT
20 AMP



NEMA 6 - 30P
230 VOLT
25 AMP



	WA414YER	WA418ZREC	WA425ZREC	Non-Energy Star WA428ZRB
Model Number	WA414YER	WA418ZREC	WA425ZREC	Non-Energy Star WA428ZRB
Product Code	421-0104	422-0126	422-0127	422-0114
BTU Cooling	14,300	17,700/18,000	24,700/25,000	27,500/28,000
EER	11.9	11.8	10.3	9
Dehumidification (pints/hour)	3.32	3.85	5.78	6.3
Airflow (CFM)	430	360/320/280	523/485/445	523/485/445
Voltage	115	208 / 230	208 / 230	208 /230
Frequency / Cycle	60 HZ	60 HZ	60 HZ	60 HZ
Amps Cooling	10.6	7.5/7.0	11.8/10.8	15/13.8
Watts Cooling	1200	1500/1525	2398/2427	3111/3167
Plug Type / Nema #	NEMA 5-15P	NEMA 6-15P	NEMA 6-20P	NEMA 6-30P
Power Cord Rating/ amps	15A	15A	20A	30A
Power Cord Type	LCDI	LCDI	LCDI	LCDI
Power Cord Length - in	5.2 Ft	77	77	69
Refrigerant	R410A	R410A	R410A	R410A
Refrigerant Charge/ Oz.	31.75	30.34	35.98	41.6
Sound (Indoor/Outdoor) dba	60/65	60/66	63.2/68.2	63.2/68.2
4 Way Air Adjustment	Yes	Yes	Yes	Yes
2 Way Air Swing	Yes	Yes	Yes	Yes
Air Discharge	Top Front	Top Front	Top Front	Top Front
Motor Type	ball bearing A/C	ball bearing/AC	ball bearing/AC	ball bearing/AC
Motor Capacitor / mfd	15μF	5μF	8μF	8μF
Controls	Remote	Remote	Remote	Remote
Operating Range	64-109 °F	64 - 109 °F	64 - 109 °F	64 - 109 °F
Cabinet Size/ inches				
Width	23.62"	23.6"	26.5"	26.5"
Depth	25.98"	25.4"	26.5"	26.5"
Height	17.71"	17.9"	18.6"	18.6"
Window Opening Width (min / max)	29"-41"	28-40.5"	31-42"	31-42"
Thru. Wall Max. Thickness (Inches)	9.6"	8"	10"	10"
N.W. / G.W lbs.	105.6 / 116.6	114/128.7	136/151	139/156
Approvals	cULus/Energy Star	cULus/Energy Star	cULus/Energy Star	cULus
Chassis Slide Out	Yes	Yes	Yes	Yes